



ATTACHED GARAGE

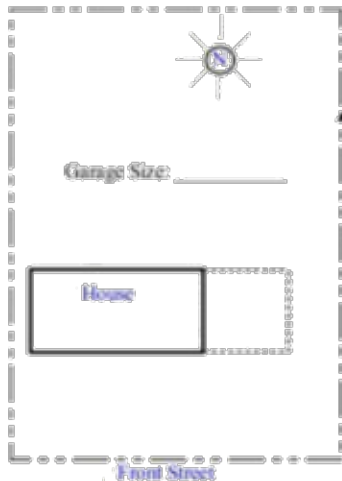

SITE PLAN

- Show size and location of proposed garage
- Show distance to side property line
- Show distance to rear property line
- Show lot dimensions and shape of lot
- Show all existing buildings

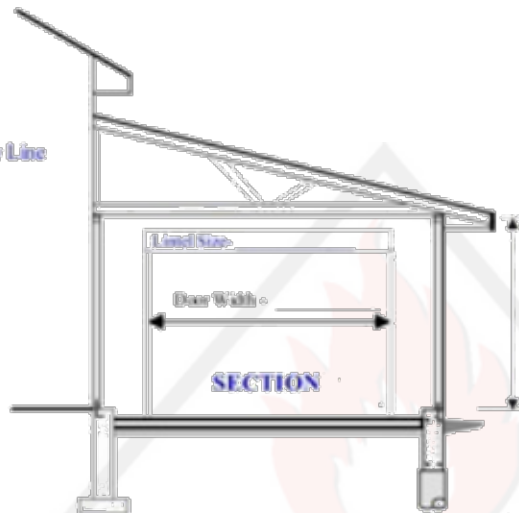

Foundation Wall

Grade Beam & Piles

Foundation Wall Height _____
 Wall Thickness _____
 Footing Size: Width _____ Thickness _____
 File Dia. _____
 File Depth _____
 Room Size: W _____ x H _____
 Rebar: In/No. _____
 In Beam _____
 File-to-beam _____

Note: The foundation must extend to the same depth or greater than the house foundation.

Indicate the following:

ROOF:

Type of roof shingles _____
 Type and thickness of roof sheathing _____
 Spacing of roof trusses _____
 Slope of roof _____
 Width of overhang _____

EXTERIOR WALL:

Type of siding _____
 Type of Film, Paper House Wrap _____
 Type and thickness of wall sheathing _____
 Size and spacing of studs _____
 Height of wall _____
 Type, size and spacing of anchor bolts _____

WALL BETWEEN HOUSE AND GARAGE:

N/A

Wall to be constructed as a vapour tight separation. No operable windows permitted. Construction must resist the passage of gas and exhaust fumes from entering the dwelling.

SLAB:

Thickness of slab _____
 Type of sub base _____
 Sloped to Outdoors
 Construction Joint between house and slab

DOOR (INTO HOUSE):

- Weather stripped
- Self-closer
- DeadBolt lock
- Hinged at lock height to frame
- Hinges secured to solid wood frame

NOTE: Air duct systems cannot be interconnected with other parts of the dwelling unit.

Split Projects must not project to less than 0.45 m from the property line, and if installed within 1.3 m from the property line they must be protected in conformance with 9.10.15.5.

Owner's Name: _____

Street Address: _____

Provided by
 MiamiCode Services Ltd.